

## 5" Diameter MultiFit™ Condenser Fan Motors

### Replaces hundreds of 1/4 - 1/12 HP Applications

#### Features:



- All angle mount
- Ball bearing
- Class B insulation
- Double sealed ball bearings
- Energy efficient PSC design
- Multi-mounting system
- Multi-horsepower, one simple connection
- Reversing plug
- Single speed
- 60° C degree
- 60 HZ
- 36" leads
- Totally enclosed



One simple connection eliminates having to select various speeds or change capacitor sizes.

HP	RPM	Speeds	Volts	Amps	Stock No.	Capacitor	Dim. Ref.	Notes
1/8, 1/10, 1/12	1075	1	208-230	0.9-0.6-0.5	9722	5MFD/370V	1	New!
1/4, 1/15, 1/6	1075	1	208-230	2.0-1.2-1.0	9723	7.5MFD/370V	2	New!

3-in-1 Design Approximate Speeds and Amps in Application						
Stock No. 9722			Stock No. 9723			
HP	Approx. RPM	Approx. Amps	HP	Approx. RPM	Approx. Amps	
1/8	1075	0.9	1/4	1075	2.0	
1/10	1135	0.6	1/5	1145	1.2	
1/12	1155	0.5	1/7	1165	1.0	

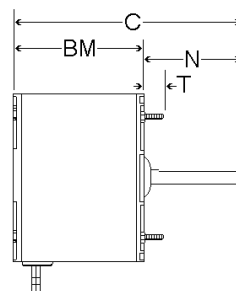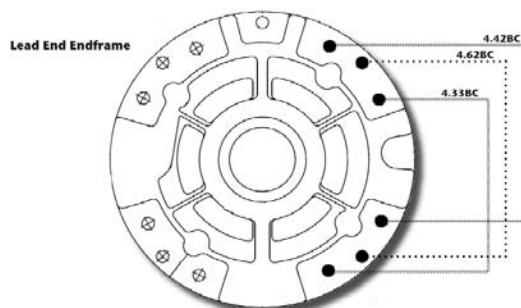

#### Approximate Dimensions

Ref.	BR	C	N	T
1	4.0	7.5	3.0	.50
2	4.5	7.5	3.0	.50



MultiFit™ Multi-Mounting System replaces:  
4.42 BC  
AOS/Westinghouse Design  
Emerson 42-Frame



MultiFit™ Multi-Mounting System replaces:  
4.62 BC  
GE 42-Frame  
Fasco 42-Frame  
AOS/Westinghouse Design



MultiFit™ Multi-Mounting System replaces:  
4.33 BC  
Emerson Clam Shell  
BE Cap-Can