



RHRV 130 PES

Introducing Our Newest Ultra Efficient HRV

- Meets Tier II performance requirements
- Energy Star certified
- Pressure taps for easy field balancing
- Washable filters (up to 13 MERV rating).
- Tilted core design for maximum efficiency
- Suitable for horizontal and vertical installation
- Limited lifetime warranty on core/2-year warranty on parts.
- 170 cfm @ 0" static pressure
- Dimensions: 12.5" x 23" x 21.5"

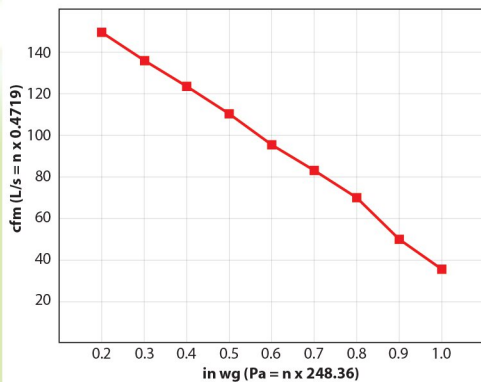

IC100-5V
Intermittent
Control



TC100-5V
Electronic
Timer

Energy Performance for Softaire Model RHRV130PES (in Heating Mode)

°C	°F	Net Airflow (L/s)	Net Airflow (cfm)	Power Consumed (Watts)	SRE	ASRE	Latent Recovery/Moisture Transfer
-25	-13	24	51	52	64	92	0.01
-25	-13	31	66	58	66	88	0.01
0	32	23	49	52	80	90	0.01
0	32	30	64	60	79	89	0.01
0	32	45	96	74	75	82	0.01

Ventilation Performance (Fan curve performed on highest speed)

External Static Pressure		Net Supply Air Flow		Gross Air Flow Supply		Exhaust	
Pa	in.W.C.	L/s	scfm	L/s	scfm	L/s	scfm
25	0.1	76	160	76	161	73	154
50	0.2	70	148	70	148	68	143
75	0.3	64	135	64	136	62	132
100	0.4	58	122	58	123	57	121
125	0.5	52	110	52	110	52	109
150	0.6	46	97	46	98	46	98
175	0.7	40	84	40	84	41	86
200	0.8	33	70	33	71	35	75
225	0.9	26	56	27	56	30	63
250	1.0	19	41	19	41	24	52

